



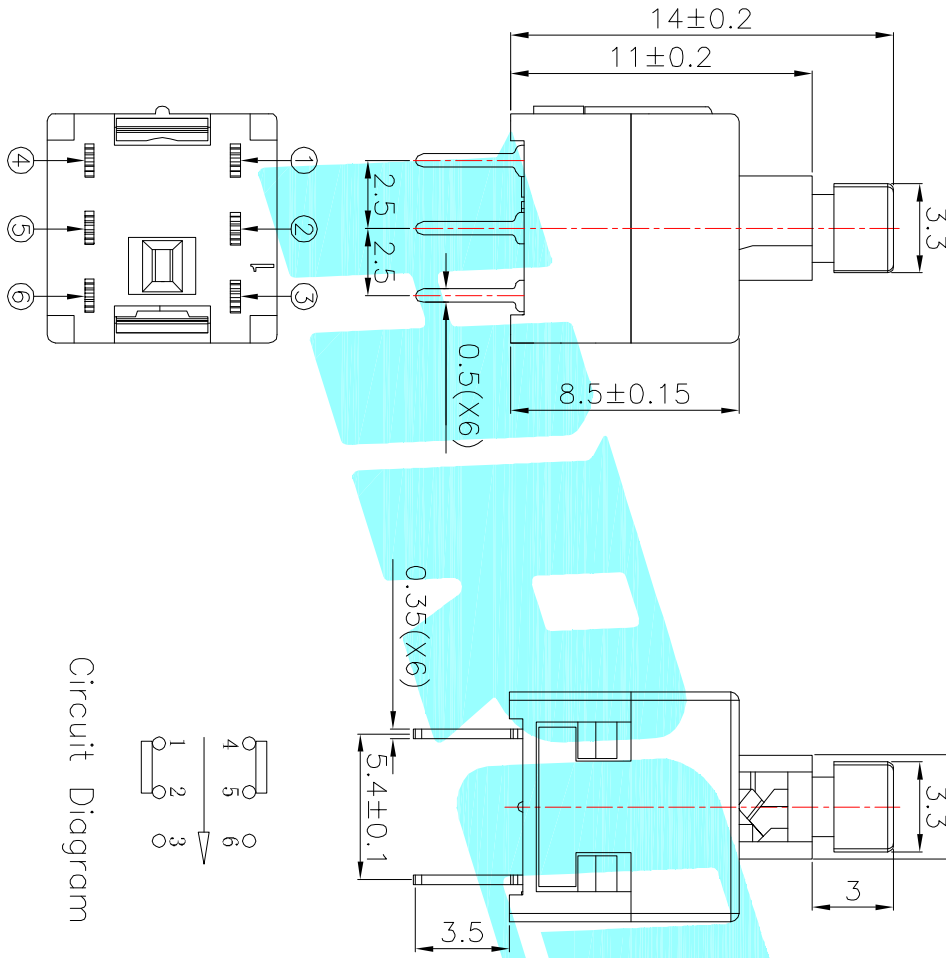
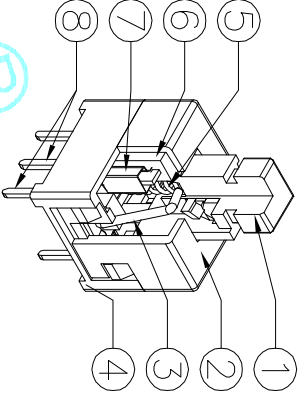



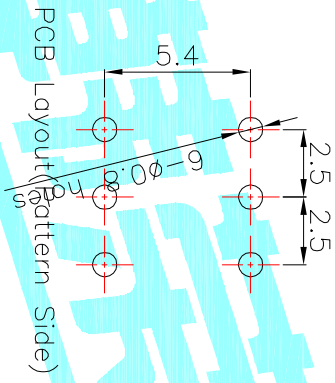

NOTE:
1. Operating Force: 240gf±80gf
2. Total Travel : 2.4±0.3mm
3. Pre Travel: 1.5±0.3mm



Circuit Diagram

NO.	Operating Type	Part No.
1	Push To Lock	K8-2213A-L1
2	Push No Lock	K8-2213A-N1
3	Push No Sound No Lock	K8-2213A-NN

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑧	Terminal	—	6	Brass strip	Plating silver	—
⑦	Contact	—	2	Phosphor bronze	Plating silver	—
⑥	Securing glue	—	2	PA66	Black	—
⑤	Spring	—	1	SUS	Natural	—
④	Base	—	1	PBT	Black	—
③	Crochet Needle	—	1	SUS	Natural	—
②	Cover	—	1	POM	Black	—
①	KNOB	—	1	POM	White	—

DRAWN		xu qi feng		2014.11.10		TITLE:		PUSHBUTTON SWITCHS	
CHECKED						PART NO.			
APPROVALS						SCALE: 1:1		PROJ: 1 OF 1	
TOLERANCES ARE		30±0.15		±0.30		ANGLE			
		10~30		±0.20					
		5~10		±0.15					
		~5		±0.10					
ECN NO.		REV.		DATE.		DESCRIPTION.		CHANGE.	
		A				NEW			