
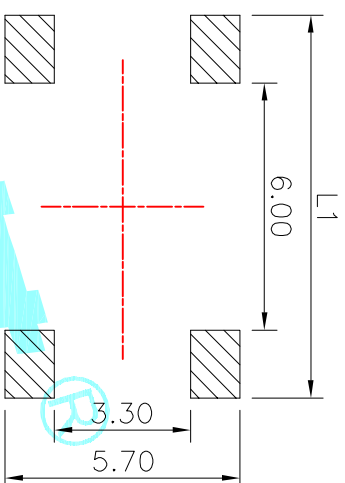
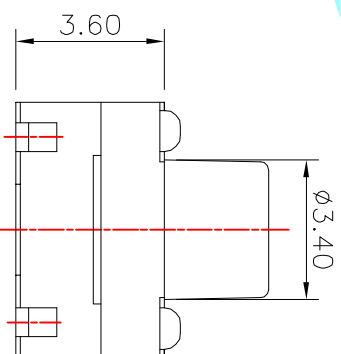
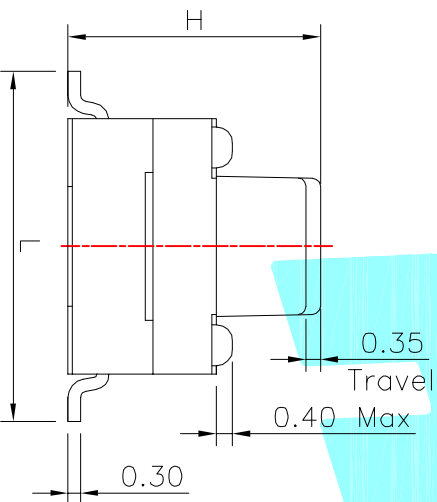


Circuit Diagram

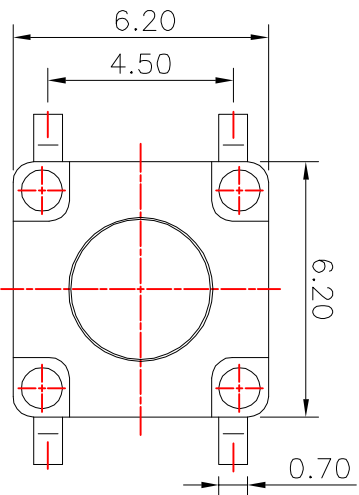

PCB Layout (Pattern side)

NO.1		NO.1	
PART NO	H	PART NO	H
A	4.3	O	11
B	4.5	P	11.5
C	5	Q	12
D	5.5	R	12.5
E	6	S	13
F	6.5	T	13.5
G	7	U	14
H	7.5	V	15
I	8	W	16
J	8.5	X	17
K	9	Y	18
L	9.5	Z	19
M	10		15.5
N	10.5		16.5

NO.2	
PART NO	Material/Qty
4	vigor 250±30
5	350±50

NO.3	
PART NO	Material/Qty
S	SUS/1PC
C	C6210/1PC
D	SUS/2PCS
F	C6210/2PCS

NO.4	
PART NO	Material/Qty
L	L1
A	8 10
B	8.5 11
C	9 11
D	9.5 12
E	10 12

NO.5-NO.6	
PART NO	NOTE
01~99	SERIAL NUMBER

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑥	Waterproof Silicone	—	1	Silica gel	Yellow	—
⑤	Terminal	—	4	Brass(0.3t)	Plating silver	—
④	Contact	—	1	F.Ag/C5210	Natural	—
③	Base	—	1	Nylon	Black	—
②	Cover	—	1	Nylon	Black	—
①	Keystroke	—	1	Nylon	Black	—

NOTE:Waterproof:IEC IP66

APPROVALS	DATE	TITLE:
DRAWN J.X.Zhang	2013/7/17	TACT SWITCHS

APPROVALS	PART NO.
CHECKED	K2-1839SP-□□□□-□□

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	TOLERANCES ARE	ANGLE	UNIT:	SCALE:	PROJ:	SHEET
—	A	—	NEW	—	—	—	30~12.5 ±0.30	±2°	mm	1:1	□	1 OF 1



ELECTRONICS CO.,LTD