
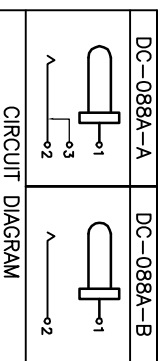
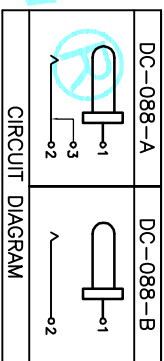
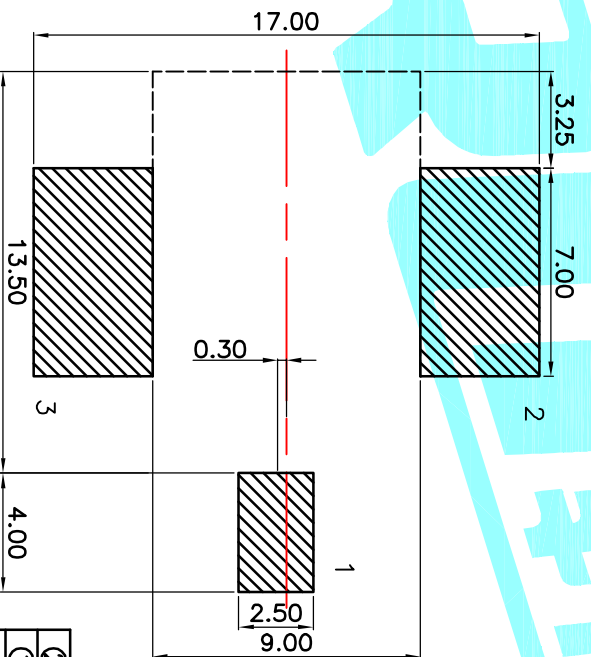


P.C.B LAYOUT(Copper-side view)

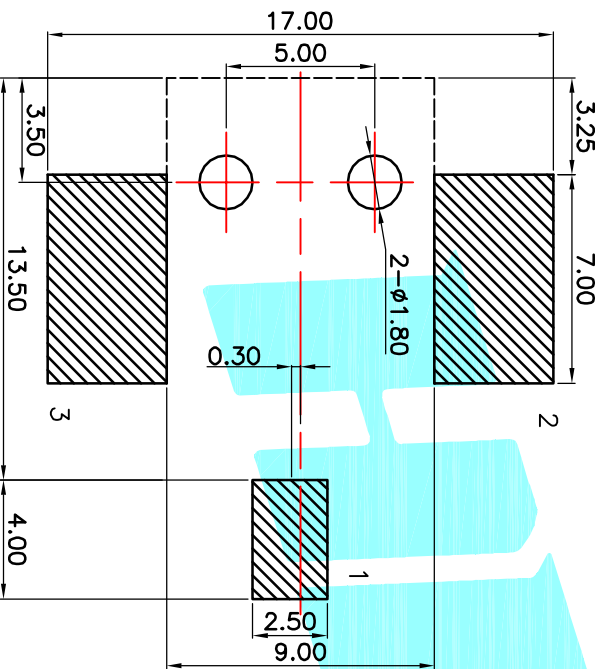

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3~20N
 Operating Life:5,000cycles

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

② Terminal	3	Phosphor bronze	Au Plating	
① Housing	1	Nylon	Black	
ITEM	PART NAME	TERN.O.	QTY.	MATERIAL
APPROVALS		DATE		
DRAWN	J.X.Zhang	2013/11/11		
CHECKED		TITLE: PHONE JACKES		
APPROVALS		PART NO. DC-088		
TOLERANCES ARE		30 ^{±0.15}	±0.30	ANGLE
	10 ^{±0.30}	±0.20		UNIT: mm
	5 ^{±0.10}	±0.15	±Z	SCALE: 1:1
	~ 5	±0.10		DRAWING NO.
		PROJ. SHEET 1 OF 1		



ELECTRONICS CO.,LTD