



P.C.B LAYOUT((copper—sided view)

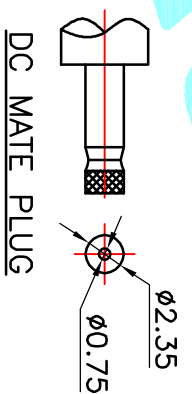

Rating:0.5A 30V DC  
 Contact Resistance:100 mΩ Max.  
 Operating temperature:—20℃~70℃  
 Operating force:3—20N  
 Operating Life:5,000cycles

②	Terminal	—	4	Phosphor bronze	Au Plating	—
①	Housing	—	1	Nylon	Black	—
ITEM	PART NAME	TERN.O.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS				DATE	—	
DRAWN	J.X.Zhang	2013/11/11		TITLE: PHONE JACKES		
CHECKED	—			ELECTRONICS CO.,LTD		
APPROVALS	—			PART NO. DC-062D		
TOLERANCES ARE				30 <sup>±</sup> 0.15	±0.30	ANGLE
				10 <sup>±</sup> 0.30	±0.20	UNIT: mm
				5 <sup>±</sup> 0.10	±0.15	SCALE: 1:1
				~ 5	±Z	DRAWING NO. —
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
—	A	—	NEW	—	—	—
—	A	—	—	—	—	—

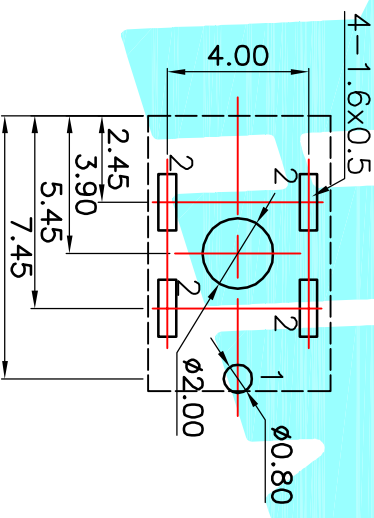

PHONE JACKES

DC-062D

PROJ. SHEET 1 OF 1