
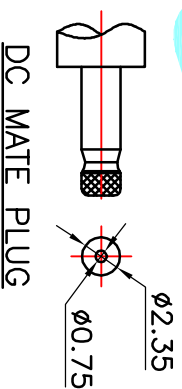


P.C.B LAYOUT(Copper-side view)

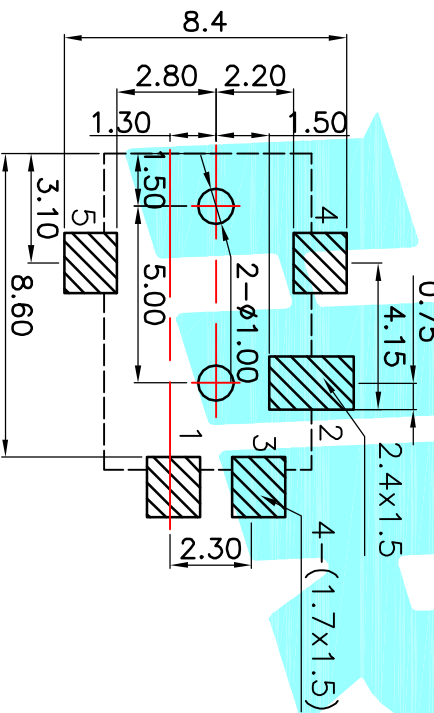

Rating:0.5A 30V DC  
 Contact Resistance:100 mΩ Max.  
 Operating temperature:-20℃~70℃  
 Operating force:3-20N  
 Operating Life:5,000cycles

②	Terminal	—	3	Phosphor bronze	Au Plating	—
①	Housing	—	1	Nylon	Black	—
ITEM	PART NAME	TERN.O.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	ELECTRONICS CO.,LTD			
DRAWN	J.X.Zhang	2013/11/11	PHONE JACKES			
CHECKED			DC-056			

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
TOLERANCES ARE						
	30 <sup>±0.15</sup>	±0.30	ANGLE			
	10 <sup>±0.20</sup>	±0.20	UNIT: mm			
	5 <sup>±0.10</sup>	±0.10	SCALE: 1:1			
	~ 5	±0.10	DRAWING NO.			PROJ. SHEET 1 OF 1