

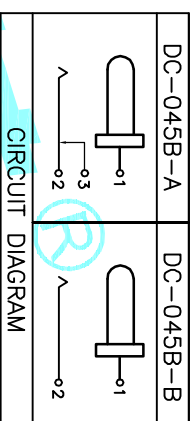


Model No.	1	2
PIN	φ1.0	φ1.3



P.C.B LAYOUT(Copper-side view)

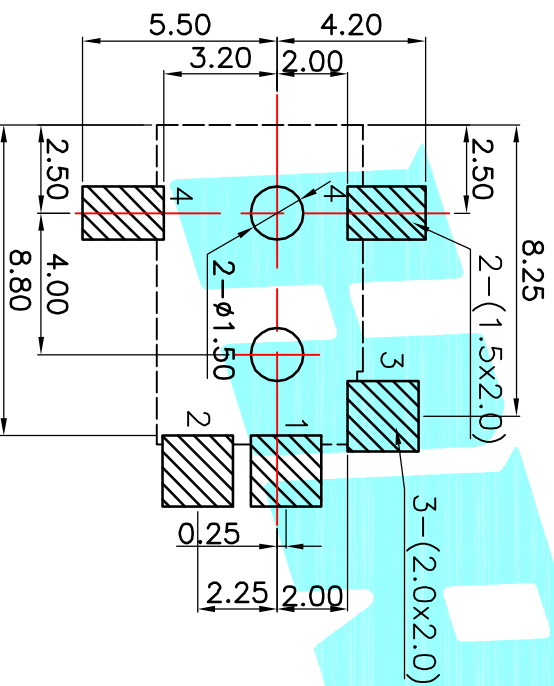

DC MATE PLUG

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

②	Terminal	—	3	Phosphor bronze	Au Plating	—
①	Housing	—	1	Nylon	Black	—
ITEM	PART NAME	TERN.O.	QTY.	MATERIAL	FINISHING	REMARK

DRAWN J.X.Zhang 2013/11/11



ELECTRONICS CO.,LTD

CHECKED

TITLE: PHONE JACKES

APPROVALS

PART NO. DC-045B

TOLERANCES ARE

30^{±0.15}
 10^{±0.30}
 5^{±0.10}

±0.30
 ±0.20
 ±0.15

ANGLE
 UNIT: mm

SCALE: 1:1

DRAWING NO.

PROJ. SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			