
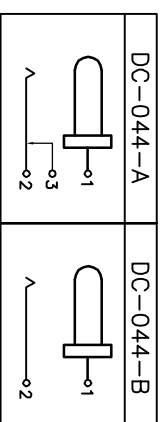
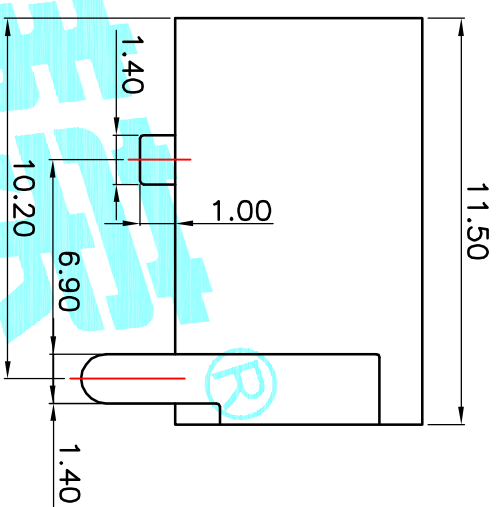


P.C.B LAYOUT(copper-sided view)

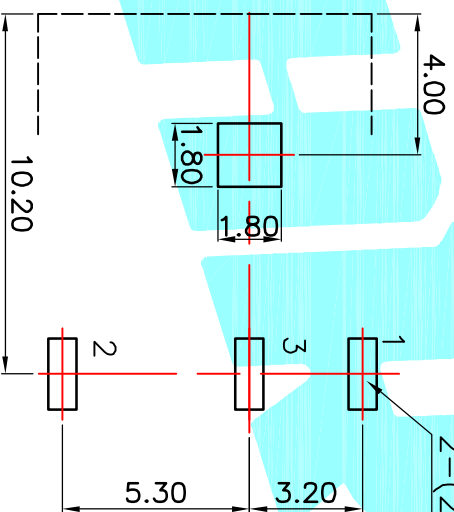

Model No.	1	2	3
PIN	$\phi 1.65$	$\phi 2.0$	$\phi 2.5$

Rating:0.5A 30V DC
 Contact Resistance:100 m Ω Max.
 Operating temperature:-20 $^{\circ}$ C~70 $^{\circ}$ C
 Operating force:3-20N
 Operating Life:5,000cycles

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

DRAWN	J.X.Zhang	DATE	2013/11/11	TITLE:	PHONE JACKS
CHECKED				PART NO.	DC-044
APPROVALS				SCALE:	1:1
TOLERANCES ARE			30 μ m以上	± 0.30	ANGLE
	10 \sim 30	± 0.20	5 \sim 10	± 0.15	UNIT: mm
	\sim 5	± 0.10		$\pm z$	DRAWING NO.
				SCALE:	1:1
					PROJ.
					SHEET 1 OF 1

ITEM	Terminal	Quantity	Material	Finishing	Remark
①	Housing	1	Nylon	Black	
	Terminal	3	Phosphor bronze	Au Plating	

APPROVALS	DATE

HRONICS
ELECTRONICS CO.,LTD