


P.C.B LAYOUT TOP VIEW

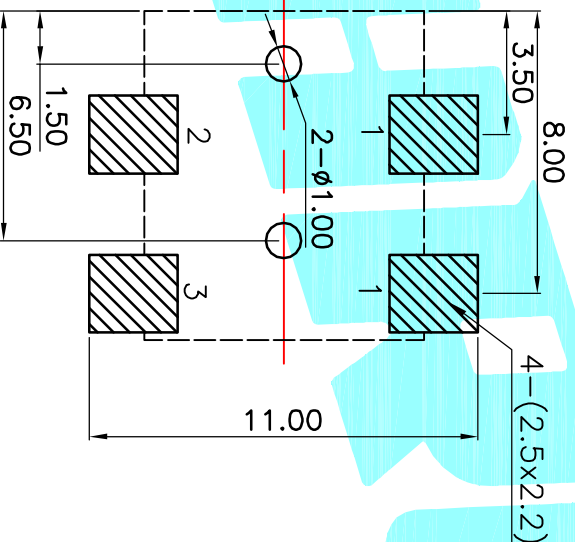

PIN=φ1.0	
PIN=φ1.3	
PIN=φ1.65	

Rating:0.5A 30V DC  
 Contact Resistance:100 mΩ Max.  
 Operating temperature:-20℃~70℃  
 Operating force:3-20N  
 Operating Life:5,000cycles

② Terminal	4	Phosphor bronze	Au Plating
① Housing	1	Nylon	Black
ITEM	PART NAME	TERNNO.	QTY.
APPROVALS		DATE	

DRAWN J.X.Zhang 2013/11/11

TITLE: PHONE JACKES



ELECTRONICS CO.,LTD

CHECKED

PART NO. DC-033

APPROVALS

TOLERANCES ARE	30 <sup>±0.1</sup>	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ.
	10 <sup>±0.10</sup>	±0.20		DRAWING NO.		SHEET 1 OF 1
	5 <sup>±0.10</sup>	±0.15	±2°			

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			